


## AX-M620ZL | AX-M820W-ZL | AX-M1220W-ZL

### Specification

Model	Size(unit:mm)	Suitable For	Used With	Weight
AX-M620ZL	250Lx47Wx28H	In-swing wooden door, narrow door frame door, metal door	M620 Serie	0.72kg
AX-M820W-ZL	227Lx54Wx31H	In-swing wooden door, narrow door frame door, metal door	M820W Serie	0.81kg
AX-M1220W-ZL	265Lx72Wx45H	In-swing wooden door, narrow door frame door, metal door	M1220W Serie	1.34kg

### Installation

- For in-swing door, install the lock body inside and then need to install the ZL bracket at the same time.
- Discharge the mounting plate from lock body.
- Fix the L bracket on the door frame and then fix the lock body on the L bracket.
- Assemble the Z bracket and then fix it on the door frame
- Fix the armature plate on the Z bracket

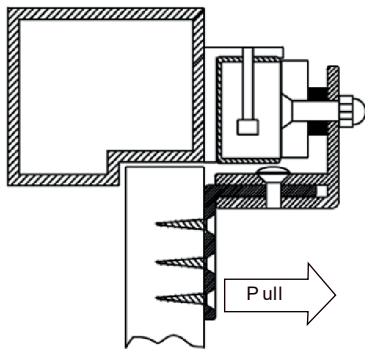

Swing in installation

