

MODELO	P5XP30
DESCRIPCION	CABLE UTP ARMADO ENSON CAT5E PRO-II EXTERIOR 30MTS P5XP30

CATEGORY 5E PATCH CORD CABLE(P5XP30)



General Features

- Available in 8 circuits (4 twisted pairs)
- Standard wires colours: Blue/Blue-white, Orange/Orange-white, Green/Green-white and Brown/Brown-white
- Available with/without shielding(UTP)
- Solid wire (AWG 24,0.5BC)
- HDPE insulator
- PVC jacket
- Frequency: Maximun 100MHz
- Operating temperature: -20°C to +75°C
- Lengths: 30m
- Connector Type: RJ45(8/8)
- Extreme termination 1: Modular plug
- Extreme termination 2: Modular plug
- Connection: 568B



Electrical Features

- DC-Loop resistance: $\leq 0.095 \Omega/m$
- Propagation speed: 0.64
- Propagation delay: 4.80-5.30 ns/m
- Delay skew < 100MHz < 0.20 ns/m
- Capacitance: 5,6 Nf/100M
- Return Loss(Min.at 250MHz): 15.60 dB
- Attenuation:(Min.at 250MHz): 39.40 dB
- Meet EIA/TIA 568 B.2, EN 50173-1, ISO/IEC 11801

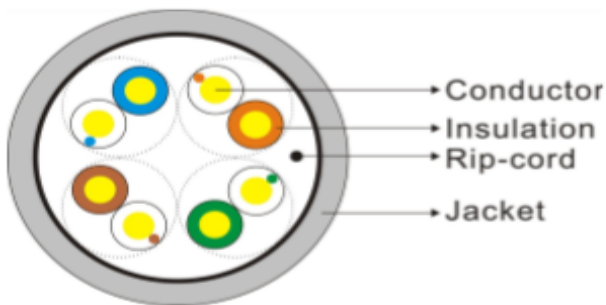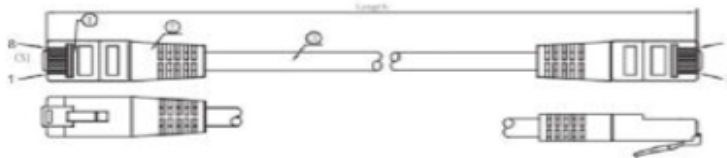

PIN OUT

