

AX-TOUCH2


Infrared Sensor Exit Button

axceze®

► Specification

- Size: 114L x 70W x 25.7H (mm)
- Input: DC12V
- Contact rating: 1A@30VOC,0.5A@125VAC
- Output contact: NO\NC\COM
- Mechanical life: 1,000,000 tests
- Suitable for door: Hollow Door
- Detection range: 4-10cm(Adjustable)
- Time delay: 0.5-25s(Adjustable)
- Operating temp: -20°C + 55°C(14-131 F)
- Suitable humidity: 0-95% (relative humidity)
- LEO Indicator:
 - White LEO indicator: Power OFF
 - Red LEO indicator: Power ON(standby)
 - Green LEO indicator: Power ON(sensation)
- Material: Stainless
- Weight: 0.2kg

► Installation & Size

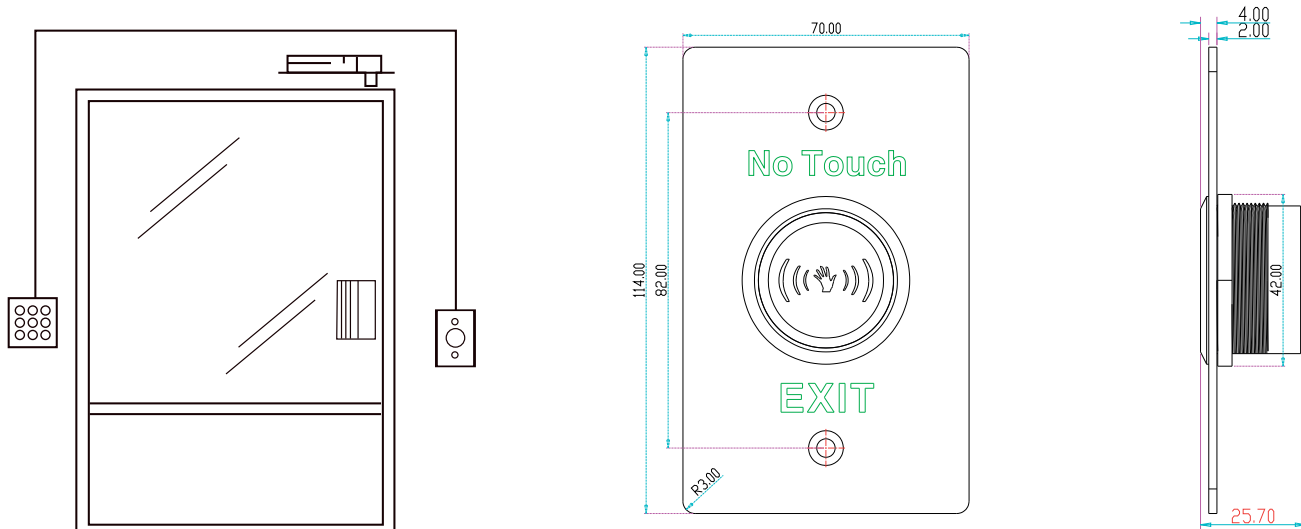


► Wiring Diagram

Detection range: 4-10cm (Adjustable)

VR1 illustration:

- ⊕ The Farthest distance
- ⊕ The Nearest distance

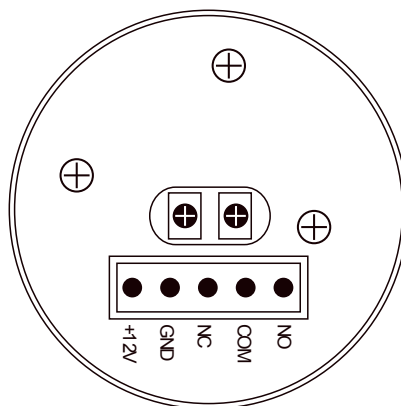

Time delay:0.5S-25S

VR2 illustration:

- ⊕ Min.time delay
- ⊕ Max.time delay

CE MA

axceze®

AX-TOUCH2