


AX-M600ZL | AX-M800W-ZL | AX-M1200W-ZL

Specification

| Model | Size(unit:mm) | Suitable For | Used With | Weight |
|--------------|---------------|--|--------------|--------|
| AX-M600ZL | 250Lx47Wx28H | In-swing wooden door, narrow door frame door, metal door | M600 Serie | 0.72kg |
| AX-M800W-ZL | 227Lx54Wx31H | In-swing wooden door, narrow door frame door, metal door | M800W Serie | 0.81kg |
| AX-M1200W-ZL | 265Lx72Wx45H | In-swing wooden door, narrow door frame door, metal door | M1200W Serie | 1.34kg |

Installation

- For in-swing door, install the lock body inside and then need to install the ZL bracket at the same time.
- Discharge the mounting plate from lock body.
- Fix the L bracket on the door frame and then fix the lock body on the L bracket.
- Assemble the Z bracket and then fix it on the door frame
- Fix the armature plate on the Z bracket

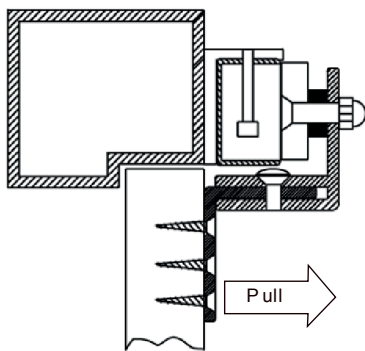

Swing in installation

