

# NVR-104LS-P4



## Key Features


- Support Ultra 265/H.265/H.264 video formats
- 4-channel input
- Plug & Play with 4 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 5MP resolution recording
- 1 SATA HDD, up to 10 TB
- Support cloud upgrad

## Specifications


| Model              | NVR-104LS-P4  |
|--------------------|---|
| Video/Audio Input  |   |
| IP Video Input     | 4-ch  |
| Network            |   |
| Incoming Bandwidth | 40Mbps  |
| Outgoing Bandwidth | 40Mbps  |
| Remote Users       | 128   |
| Protocols          | P2P, NTP, DHCP, PPPoE   |
| Video/Audio Output |   |
| HDMI/VGA Output    | HDMI:<br>1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz<br>VGA:<br>1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz |
| Audio Output       | 1 RCA   |

|                           |  |
|---------------------------|--|
| Recording Resolution      | 1080p/960p/720p/D1/2CIF/CIF  |
| Synchronous Playback      | 4-ch   |
| <b>Decoding</b>           |  |
| Decoding format           | Ultra 265/H.265/H.264  |
| Liveview/Playback         | 1080p/960p/720p/D1/2CIF/CIF  |
| Capability                | 1 x5MP@30, 2 x4MP@25, 2 x3MP@30,4 x 1080p@25                       |
| <b>Hard Disk</b>          |  |
| SATA                      | 1 SATA interface   |
| Capacity                  | up to 10TB for each disk   |
| <b>External Interface</b> |  |
| Network Interface         | 1 RJ45 10M/100M self-adaptive Ethernet Interface                   |
| USB Interface             | Rear panel: 2 x USB2.0   |
| <b>PoE</b>                |  |
| Interface                 | 4 independent 100 Mbps PoE network interfaces                      |
| Max Power                 | Max 30W for single port<br>Max 54W in total (13.5W for each)       |
| Supported Standard        | IEEE 802.3at, IEEE 802.3af   |
| <b>General</b>            |  |
| Power Supply              | 48V DC<br>Power Consumption: ≤10 W (without HDD)                   |
| Working Environment       | -10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing) |
| Dimensions (W×D×H)        | 205mm × 205mm × 46mm (8.1" × 8.1" × 1.8")                          |
| Weight (without HDD)      | 0.64kg (1.41lb)  |

## Dimensions

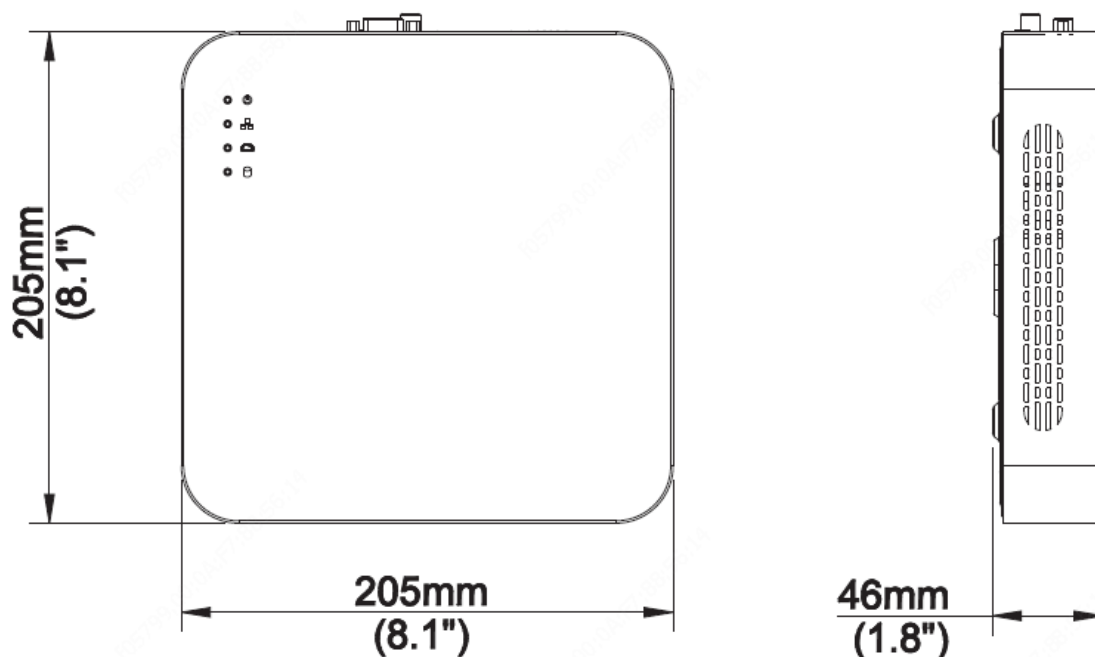

### Rear Panel

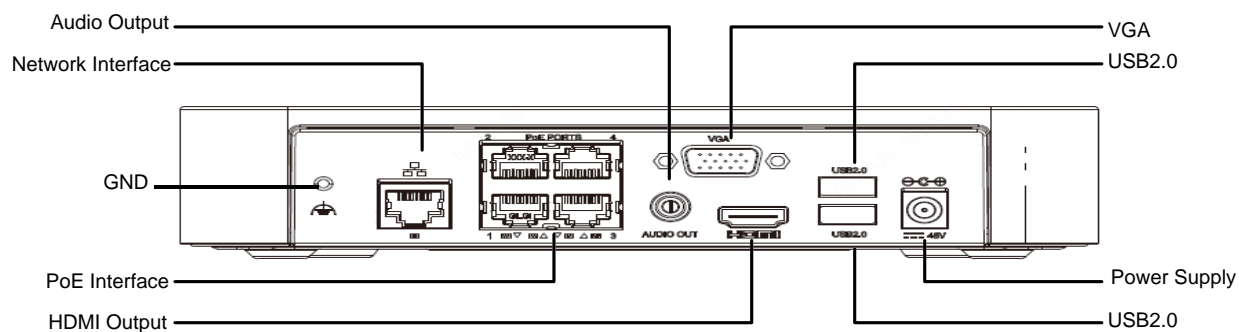

[www.uniview.com/uniarch](http://www.uniview.com/uniarch)

©2019 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.